


PRESTIGE BIFOLD WINDOW



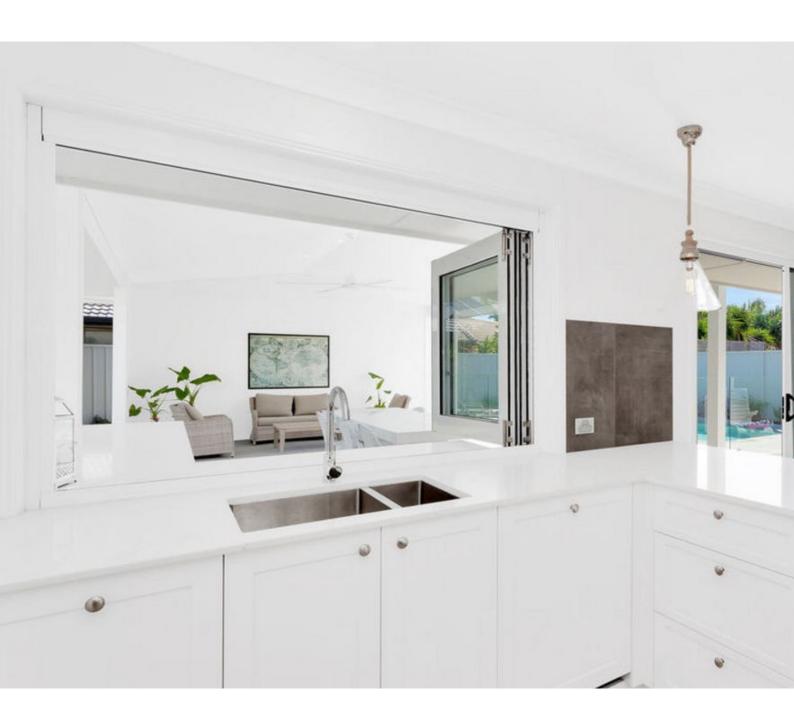

FEATURES

Ol Top Hung System

High strength 50mm door sash

Unique roller adjustment feature for smooth, trouble free operation

Ability to swing in or swing out

Handle includes a deadlock for superior security

Optional low profile sill for commercial applications

High performance stainless steel hardware

Tested to Australian standards

PERFORMANCE

Frame sizes 100mm

Max. window height 1800mm

Max. window width 8000mm

Max. panel width 1285mm

Max. panel weight 90kgs

Max. water rating 300pa

Max. wind rating 6000Pa ULS


Max. glass thickness 26mm

Max. acoustic rating Rw35

Max. bushfire rating BAL 40



STANDARD CONFIGURATIONS

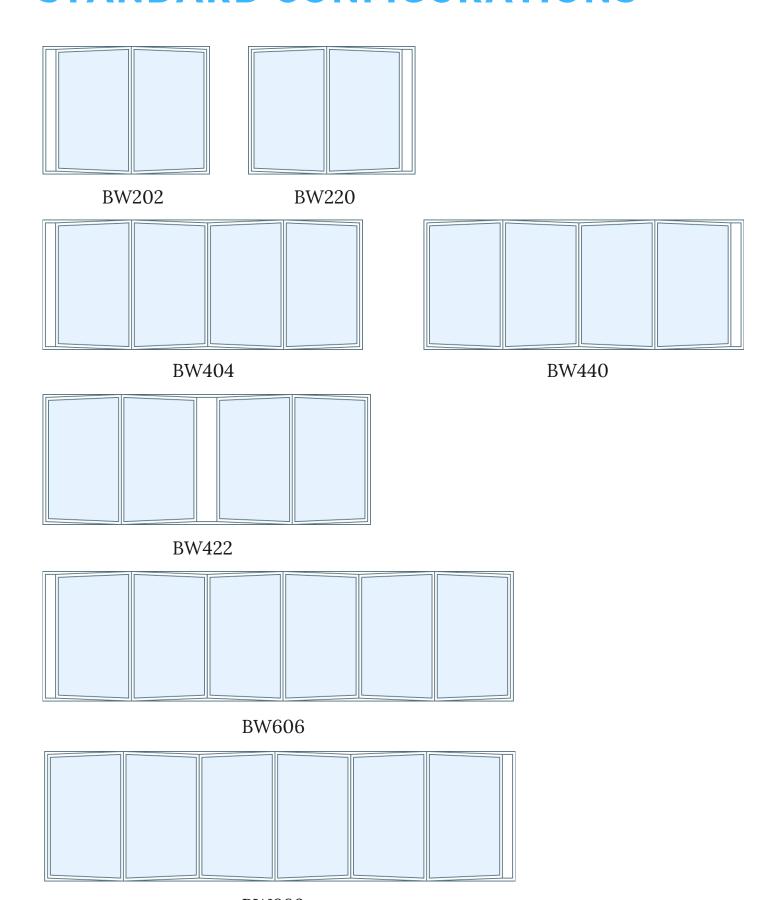

BW660





UPGRADE OPTIONS



FlameShield

If you are constructing in a bushfire-prone area, you are required to use bushfire rated building materials for construction.



Sound Smart

Face a heavily trafficked road and you can't hear yourself think? The Sound Smart range will turn a busy thoroughfare into a blissful urban hum.



Solar Comfort

It is a cost effective way to keep homes at a comfortable temperature all year round, acting as extra insulation from outside elements.



Double Glazing

It is designed to reduce the amount of warmth lost during winter and prevent unwanted heat gain during summer