

PRESTIGE CASEMENT WINDOW




FEATURES

- 01** Superior strength with robust 100mm frames
- 02** Multi-point locking system
- 03** Optional Folding key lockable, stainless steel chain winder for added security
- 04** Full joint sealing for superior weatherproofing performance
- 05** Maximum natural ventilation with near 90-degree opening angle
- 06** Stylish, high quality hardware that's functional and aesthetically pleasing
- 07** Integrated screen track to support flyscreen, safety or supascreens
- 08** Tested to Australian standards

PERFORMANCE

Frame sizes	100mm
Max. window height	2450mm
Max. window width	3690mm
Max. panel height	1800mm
Max. panel width	860mm
Max. panel weight	42kgs
Max. water rating	600pa
Max. wind rating	4500Pa ULS
Max. glass thickness	24mm
Max. acoustic rating	Rw38
Max. bushfire rating	BAL 40

STANDARD CONFIGURATIONS

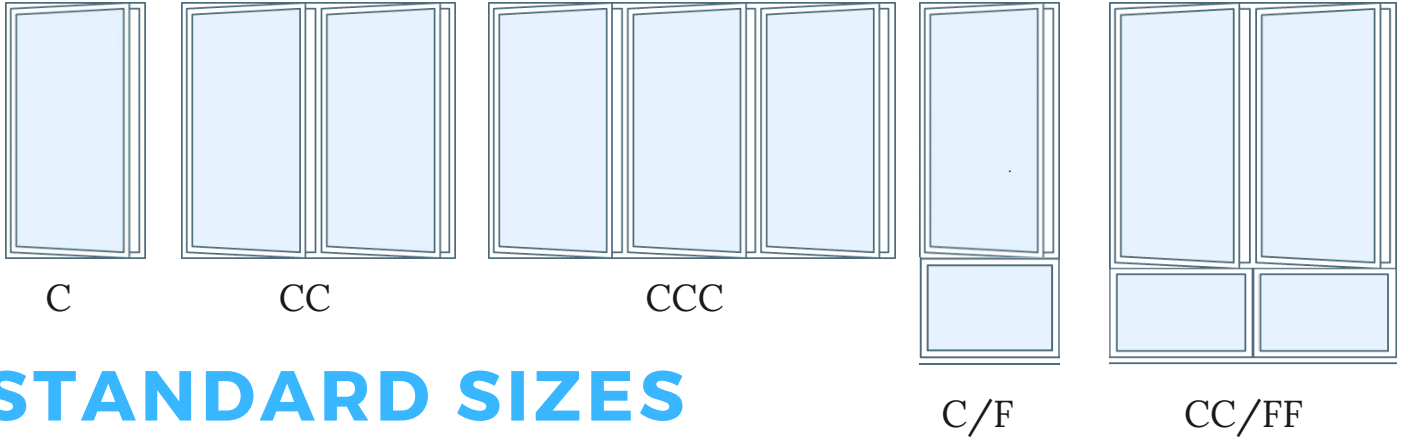

STANDARD SIZES

Stud Opening Size	660mm	960mm	1260mm	1560mm	1860mm
Frame Size	610mm	910mm	1210mm	1510mm	1810mm
950mm	 C0906	 CC0909	 CC912	 CCC0915	 CCC0918
1250mm	 C1206	 CC1209	 CC1212	 CCC1215	 CCC1218
1550mm	 C1506	 CC1509	 CC1512	 CCC1515	 CCC1518
1850mm	 C1806	 CC1809	 CC1812	 CCC1815	 CCC1818
2150mm	 C/F2106	 CC/FF2109	 CC/FF2112	 CCC/FFF2115	 CCC/FFF2118




UPGRADE OPTIONS



FlameShield

If you are constructing in a bushfire-prone area, you are required to use bushfire rated building materials for construction.




Sound Smart

Face a heavily trafficked road and you can't hear yourself think? The Sound Smart range will turn a busy thoroughfare into a blissful urban hum.



Solar Comfort

It is a cost effective way to keep homes at a comfortable temperature all year round, acting as extra insulation from outside elements.



Double Glazing

It is designed to reduce the amount of warmth lost during winter and prevent unwanted heat gain during summer