


RESIDENTIAL STACKER DOOR



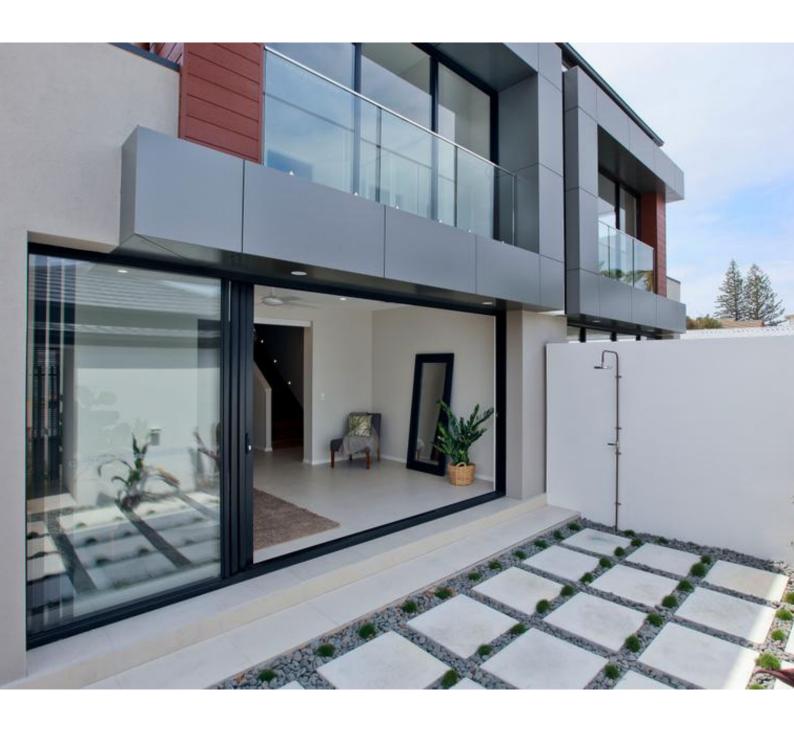

FEATURES

	High performance roller
01	system ensures smooth
	sliding

- O5 Sump sill for extreme weather conditions
- High quality seals for improved weather proofing performance
- Optional low profile sill for pedestrian and wheel chair access
- Handle includes a mortice lock for superior security
- Integrated screen track to support flyscreen, safety or supascreens

BAL 40

- Conveniently located key cylinders for easy operation
- Tested to Australian standards

PERFORMANCE


Max. bushfire rating

Frame sizes	140mm	166mm
Max. door height	2450mm	2700mm
Max. door width	6246mm	7200mm
Max. panel width	1350mm	1350mm
Max. panel weight	50kgs	100kgs
Max. water rating	300pa	600pa
Max. wind rating	3300Pa ULS	4500Pa ULS
Max. glass thickness	6.76mm	12.76mm
Max. acoustic rating	Rw30	Rw44


BAL 40




STANDARD CONFIGURATIONS

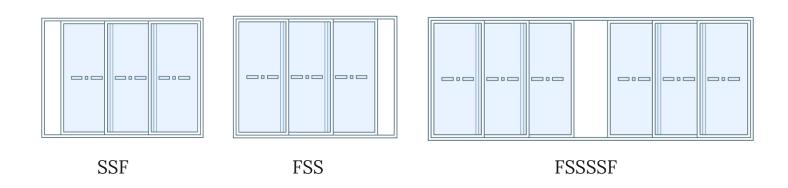

STANDARD SIZES

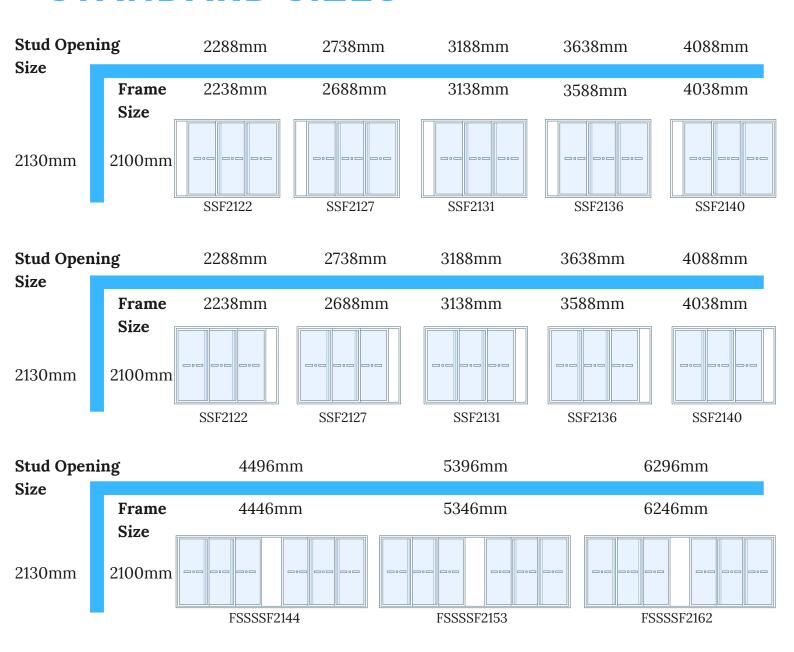



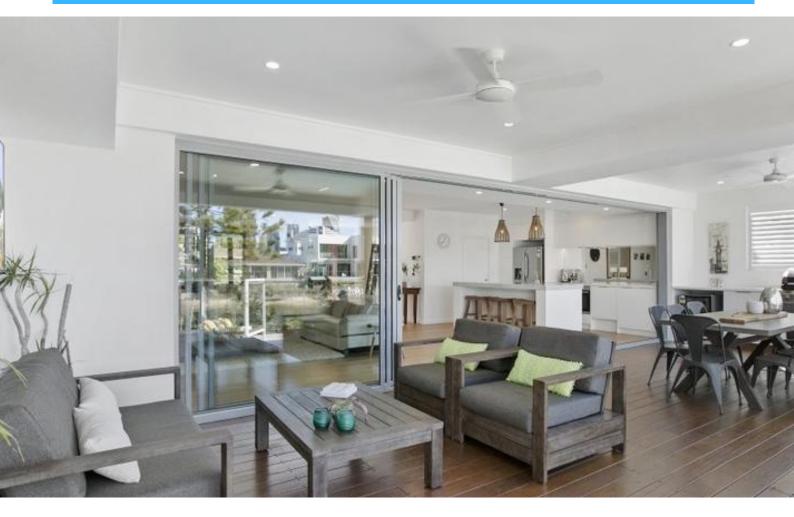

UPGRADE OPTIONS



FlameShield

If you are constructing in a bushfire-prone area, you are required to use bushfire rated building materials for construction.



Sound Smart

Face a heavily trafficked road and you can't hear yourself think? The Sound Smart range will turn a busy thoroughfare into a blissful urban hum.



Solar Comfort

It is a cost effective way to keep homes at a comfortable temperature all year round, acting as extra insulation from outside elements.



Double Glazing

It is designed to reduce the amount of warmth lost during winter and prevent unwanted heat gain during summer