

# PRESTIGE STACKER DOOR



## FEATURES

- 01

High performance double or quad roller system ensures smooth sliding
- 02

High quality seals for improved weather proofing performance
- 03

Handle includes a mortice lock for superior security
- 04

High strength 40mm door sash
- 05

Sump sill for extreme weather conditions
- 06

Optional low profile sill for pedestrian and wheel chair access
- 07


Integrated screen track to support flyscreen, safety or supascreens
- 08

Tested to Australian standards

## PERFORMANCE

Frame sizes	150mm	200mm	250mm
Max. door height	3100mm	3100mm	3100mm
Max. door width	12300mm	12840mm	12840mm
Max. panel width	1800mm	1800mm	1800mm
Max. panel weight	160kgs	160kgs	160kgs
Max. water rating	650pa	650pa	650pa
Max. wind rating	6000Pa ULS	6000Pa ULS	6000Pa ULS
Max. glass thickness	28mm	28mm	28mm
Max. acoustic rating	Rw34	Rw34	Rw34
Max. bushfire rating	BAL 40	BAL 40	BAL 40


## STANDARD CONFIGURATIONS




SSF




FSS

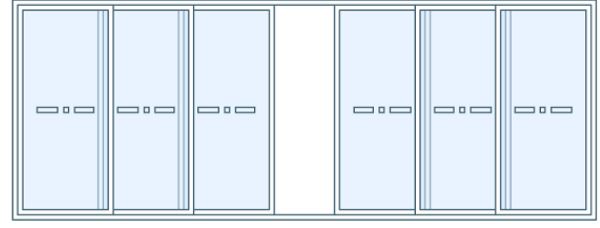


FSSSSF

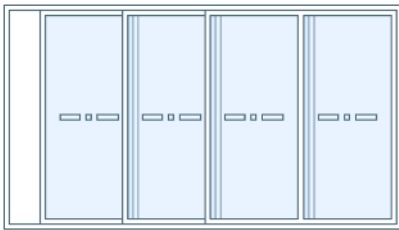

SSSF

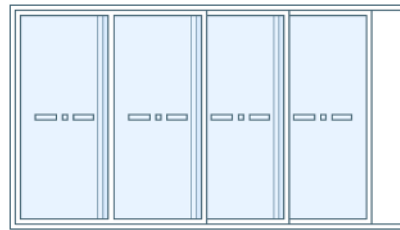


FSSS

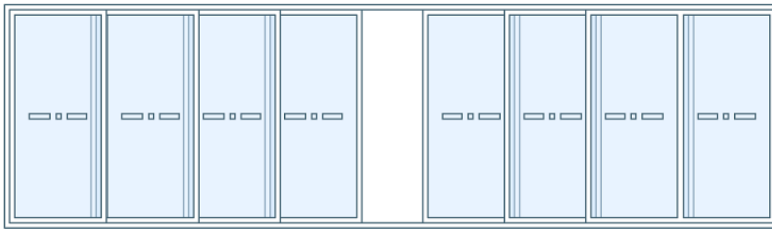


FSSSSSF


## CAVITY DOOR CONFIGURATIONS



SSCavity




CavitySS

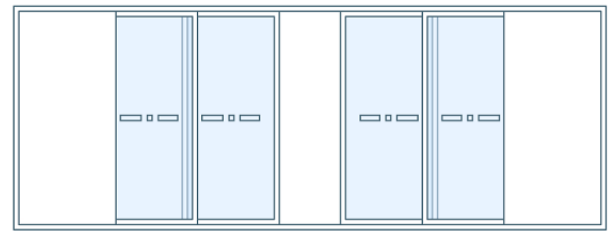


CavitySSSSCavity

## CORNER DOOR CONFIGURATIONS

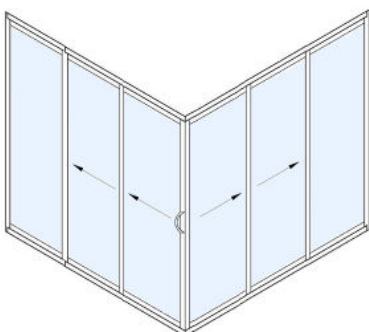

FSS-SSF 90degree External

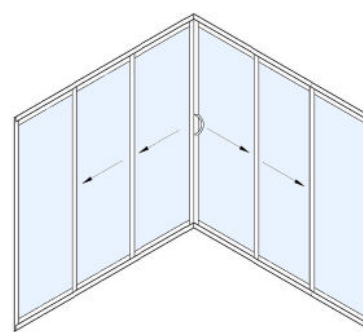

FSS-SSF 90degree Internal




## UPGRADE OPTIONS



### **FlameShield**

If you are constructing in a bushfire-prone area, you are required to use bushfire rated building materials for construction.




### **Sound Smart**

Face a heavily trafficked road and you can't hear yourself think? The Sound Smart range will turn a busy thoroughfare into a blissful urban hum.



### **Solar Comfort**

It is a cost effective way to keep homes at a comfortable temperature all year round, acting as extra insulation from outside elements.



### **Double Glazing**

It is designed to reduce the amount of warmth lost during winter and prevent unwanted heat gain during summer