

# RESIDENTIAL DOUBLE HUNG WINDOW




## FEATURES

- 01** Spring operated sashes
- 02** Engineered sash balances for trouble free operation
- 03** Sashes operate and are contained within the window frame
- 04** Conveniently located key cylinders for easy operation
- 05** Maximise ventilation into smaller spaces due to the double hung design
- 06** Airflow can be easily controlled through the top, bottom, or both sashes
- 07** Integrated screen track to support flyscreen, safety or supascreens
- 08** Tested to Australian standards


## PERFORMANCE

Frame sizes	52mm
Max. window height	2300mm
Max. window width	3010mm
Max. panel width	900mm
Max. panel weight	22kgs
Max. water rating	450pa
Max. wind rating	4500Pa ULS
Max. glass thickness	6.76mm
Max. acoustic rating	Rw32
Max. bushfire rating	BAL 40


# STANDARD CONFIGURATIONS



D



DD

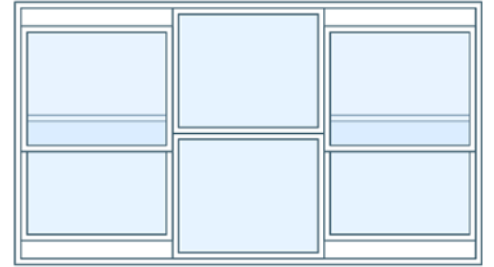

DDD

# STANDARD SIZES

Stud Opening Size	660mm	960mm	1260mm	1560mm	1860mm	2160mm
<b>Frame Size</b>	610mm	910mm	1210mm	1510mm	1810mm	2110mm
950mm	 D0906	 D0909	 DD0912	 DD0915	 DD0918	 DD0921
1250mm	 D1206	 D1209	 DD1212	 DD1215	 DD1218	 DD1221
1550mm	 D1506	 D1509	 DD1512	 DD1515	 DD1518	 DD1521
1850mm	 D1806	 D1809	 DD1812	 DD1815	 DD1818	 DD1821
2150mm	 D2106	 D2109	 DD2112	 DD2115	 DD2118	 DD2121




## UPGRADE OPTIONS



### **FlameShield**

If you are constructing in a bushfire-prone area, you are required to use bushfire rated building materials for construction.



### **Sound Smart**

Face a heavily trafficked road and you can't hear yourself think? The Sound Smart range will turn a busy thoroughfare into a blissful urban hum.



### **Solar Comfort**

It is a cost effective way to keep homes at a comfortable temperature all year round, acting as extra insulation from outside elements.