

RESIDENTIAL FIXED WINDOW





FEATURES

Best for areas with views and require natural light

High quality seals for improved weather proofing performance

O2 Superior strength thanks to robust 100mm frames

Concealed fixings provide a beautiful clean finish

Ability to be either Internally or Externally glaze depending on site requirements

Variety of window style configurations when combined with other Windows

Safety-first design with no exposed sharp edges

Tested to Australian standards

PERFORMANCE

Frame sizes 67mm/100mm

Max. door height 5325mm

Max. door width 6400mm

Max. panel width NA

Max. panel weight 120kgs

Max. water rating 600pa

Max. wind rating 6000Pa ULS


Max. glass thickness 24mm

Max. acoustic rating Rw38

Max. bushfire rating BAL 40



STANDARD CONFIGURATIONS




F




FF




FFF

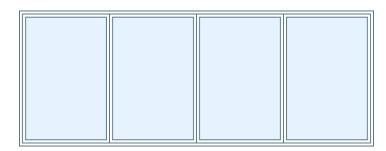

FFFF

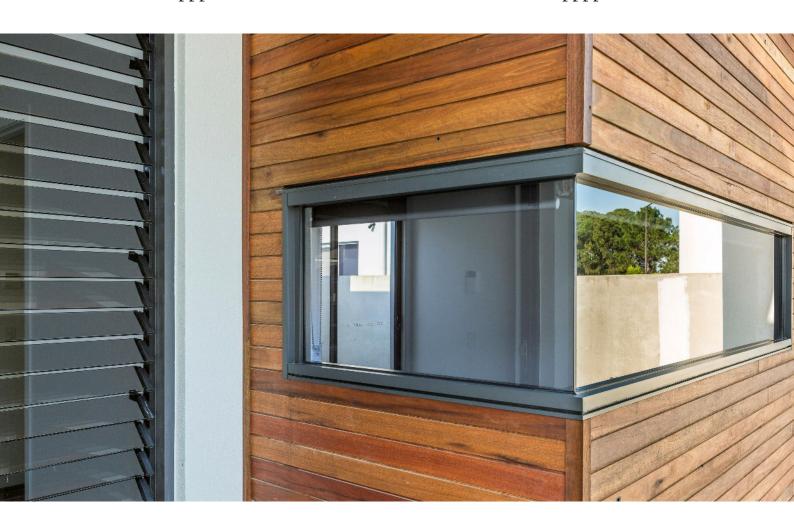



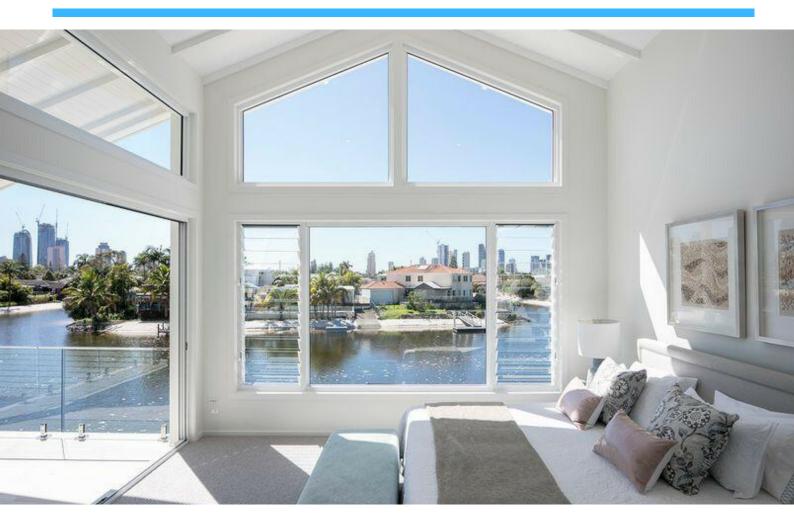

UPGRADE OPTIONS



FlameShield

If you are constructing in a bushfire-prone area, you are required to use bushfire rated building materials for construction.



Sound Smart

Face a heavily trafficked road and you can't hear yourself think? The Sound Smart range will turn a busy thoroughfare into a blissful urban hum.



Solar Comfort

It is a cost effective way to keep homes at a comfortable temperature all year round, acting as extra insulation from outside elements.



Double Glazing

It is designed to reduce the amount of warmth lost during winter and prevent unwanted heat gain during summer